

SS AIR FILTER



Your Air-Actuated Instrument and Equipment work at their best for a long period when you feed with clean dry air . PLACKA AF- Series Air Filter removes **completely** the moisture and dust particles, and provides a clean air. Its compactness and highly accurate performance for a long period with minimum of maintenance make for an optimum compromise between the ideal and the practical, consistent with end-use.


This economically priced unit is extensively used for Process Control Instruments, Air-actuated Control Valves, Cylinders transducers and other equipments.

SALIENT FEATURES:

- Longer life assured as the materials used are selected for their corrosion resistance and long wear.
 - In addition to solid particles, the unit extracts a high percentage of water thus ensuring trouble-free service even in the most adverse conditions.
 - The dust and liquid contaminants can be fully drained out when the Air Filter is mounted vertically as in the case of Control Valves, Transmitters, etc
- Custom made Unit for Control Valves, Transmitters and other field mounted Instruments.
- Simple, versatile built-in mounting arrangements by bolts and clamps. For panel mounting, tapped holes are provided at the top of the spring case for mounting screws.
 - Most economically priced.
 - Model AFSS with SS components instead of brass, for corrosive working conditions of Fertilisers, Nuclear, Refinery and Steel Plants.

OPERATION:

- The primary air through the inlet port, passes through the filter element, leaving down the contaminants in the bowl and clean air is supplied through the output port
- In a regular intervals, the drain valve should be opened and the dust/contaminants to be drained for effective function of the Air Filter(AF)

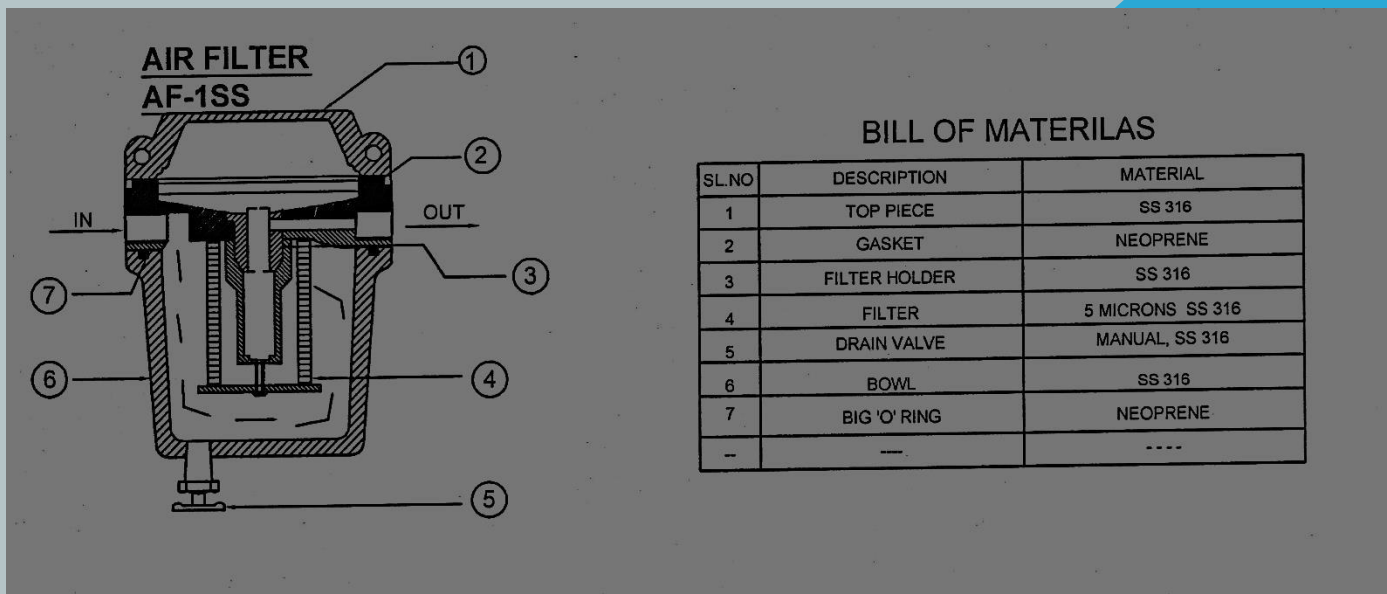

Model	End Fitting
AF-1SS	1/4" NPT (F)/ BSP (F)
AF-2SS	3/8" NPT (F)/ BSP (F)
AF-3SS	1/2" NPT (F)/ BSP (F)
AF-4SS	3/4" NPT (F)/ BSP (F)
AF-5SS	1" NPT (F)/ BSP (F)

AF -SPECIFICATIONS

Service	: Air
Max.Inlet Pressure	: 18Kg/Sq.cm(250psi)
End Connections	: 1 Inlet,1 Outlet (Pressure gauge port on request)
End Connection Size	: Screwed (Refer Table)
Ambient Temperature	: 100° C
MOC of Air Filter	: SS 304 / SS316
Filter	: Sintered Bronze/ Poly Propylene Plastic / SS316
Drain Valve	: SS304/SS316
Bowl Capacity	: 130cc
Gasket	: Neoprene/EPDM
Mounting	: Surface or Panel
Models	: Refer table

Placka Instruments India Pvt. Ltd.,

No:5, Ramamoorthy Street, Nerhu Nagar, Chromepet Chennai – 600 044, Tamil Nadu, India.

Ph : 91-044 2223 4562, 2223 1559 Fax : 2223 6984

E-mail : sales@plackainstruments.com ; plackainstruments@yahoo.com Website : www.plackainstruments.com